

ROLLING DOOR

CORROSION RESISTANT ROLLING DOOR



CLOPAY COMMERCIAL – MODELS CESD10CR (SERVICE), CESD20CR (INSULATED)



Model CESD10CR Door

CORROSION RESISTANT SECURITY WITH FLEXIBILITY

DURABLE CORROSION RESISTANCE

Our corrosion-resistant service and insulated doors are built tough to withstand the most extreme commercial and industrial environments — inhibiting red rust and oxidation. Made with a ZRG powder coated shaft, zinc-coated bearings, corrosion resistant fasteners and the rugged NEMA 4X operator — you're getting a door system that's built to last.

DEPENDABLE WINDLOAD

Add to the safety and wind resistance of your structure by installing a stainless steel corrosion resistant door that can withstand up to 40 PSF.

FLEXIBLE DESIGN

The choice of 304 stainless steel #4 or clear anodized curtain and guides give you the benefit of corrosion resistance without sacrificing aesthetics.

APPLICATIONS

Our corrosion-resistant service and insulated doors are designed for water treatment plants, chemical storage or processing facilities, coastal and marine environments, or any industrial or commercial application where corrosion is a concern.

CORROSION RESISTANT ROLLING DOOR

STANDARD COMPONENT MATERIALS AND FINISHES

- 1. BRACKETS** – 304 stainless steel with a zinc plated flange bearing.
- 2. COUNTER-BALANCE SHAFT** – 6-5/8" steel tubing with ZRG powder coating.
- 3. HOOD** – Matches the curtain material 304 stainless steel #4 finish or clear anodized aluminum.
- 4. REMOVABLE BELLMOUTH** – 304 structural stainless steel or clear anodized aluminum.
- 5. CURTAIN** – 304 stainless steel #4 finish or clear anodized aluminum.
304 stainless steel endlock and/or windlocks with 304 stainless steel rivets used on all curtain materials.
- 6. GUIDES** – 304 structural stainless steel or clear anodized aluminum.
- 7. OPERATION** – Comes standard with a NEMA SG 4X operator.
- 8. BOTTOM BAR** – Double angle 304 stainless steel #4 or clear anodized aluminum.

MATERIALS AND FINISHES

- Available in 304 stainless steel #4 or clear anodized aluminum.

OPERATION AND STRUCTURAL REQUIREMENTS

Motor Operation Only

- Comes standard with our corrosion resistant NEMA 4X operator


This product is supported by a guide assembly attached to the jamb construction.
No additional header support is required.

Windload Options

- Up to 40 PSF available on stainless steel units only

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.

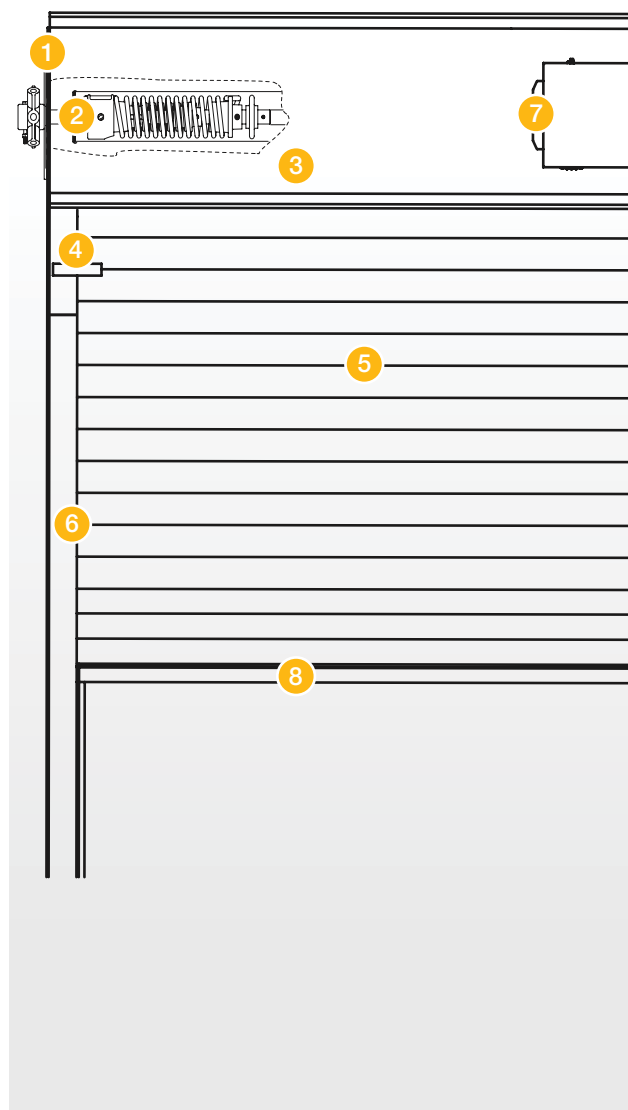

For more information on these and other Clopay products, visit clopaycommercial.com.
Architects and specifiers, visit architectdoorhelp.com.



©2024 Clopay Corporation. All rights reserved.

